January 2016 Block of the Month Wheel of Fortune



The Wheel of Fortune block is made using foundation paper piecing. You'll need four copies of template A and template B. **DOWNLOAD AT IPSCORK.COM**

Cutting Instructions

You'll be creating four piles of fabrics to use in each of the four sections of each template. Each numbered pile corresponds with the numbered section of your template.


Pile 1: Blue Fabric Eight pieces 2.5 x 5.5 inches Use for Number 1 space on template

Pile 3: White Fabric Eight pieces 4 x 5.5 inches Use for Number 3 space on template Pile 2: White Fabric Eight pieces 3.75 x 4.5 inches Use for Number 2 piece on template

Pile 4: Print Fabric Eight pieces 3.5 x 3.5 inches Use for Number 4 space on template


Preparing your Templates


Begin by cutting your templates apart. You don't need to be exact, as you'll be trimming them down after you've sewn your fabrics.

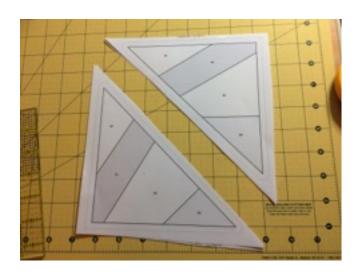


Sewing Your Templates


Using a light box, light source or sunny window, hold your template up and place fabric piece 1 over the number 1 space on the WRONG SIDE of the template. Ensure that the entire block is covered with the fabric, including seam allowances. If your fabric is a print, be sure that it is placed print side up.






For fabric 2, place wrong side up with 1/4 inch overlap. Ensure that when you flip the fabric right side up it covers up the entire space of A2 or B2, including seam allowances.







Fold template back on sewing line and trim seam to 1/4 inch. This can be done with scissors or a ruler and rotary cutter.


Flip fabric up and press.





Continue the fabric placement following the steps described above, for the rest of your templates.

Once all of your templates are sewn, trim templates down by cutting a 1.4 inch away from the bolder line.





Once you have trimmed all of your templates, sew them in pairs of A & B. Remove the paper only in the seam allowances.

Sew your squares into rows. Remove the paper only in the seam allowances.





Sew your rows together. Remove the paper only in the seam allowances. As there are bias edges exposed, keep your paper in the template until block is sewn into the quilt.

DOWNLOAD THE TEMPLATE AT WWW.IPSCORK.COM